

CL-4 CONDENSER MICROPHONE

CL-4 Condenser Microphone

- CL-4 AD 48 V phantom
- CL-4 BD 15 V battery
- Omni

Art. no. 1100
Art. no. 1101

Frequency response	40 – 20 000 Hz (See graph)
Polar pattern	Omni
Maximum SPL for 0.5% THD at 1 kHz	120 dB
A-weighted noise level (acc. to IEC 179-A)	26 dB
Sensitivity at 1 kHz and 1 kohm load	12 mV/Pa ± 1dB
Output impedance	170 ohms
Minimum load impedance	1 kohm
Power supply CL-4 AD	48 V ± 4 V phantom
Power supply CL-4 BD	15 V battery
Current consumption	0.5 mA
Microphone	
Weight	12 g
Length	18.5 mm
Diameter	10.5 mm
Amplifier	
Weight	100 g
Length	117 mm
Diameter	19 mm
Cable length	2 m



CL-4 AD (1100)




CL-4 BD (1101)


CL-4 Condenser Microphone

Frequency response

The frequency response may vary within ± 2.5 dB of the published graph.
Before delivery, each microphone is measured and the individual graph supplied.

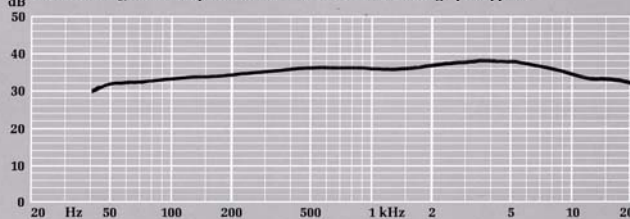

Polar diagram

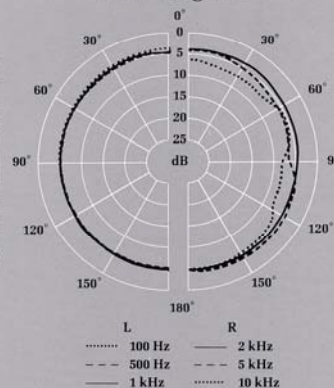

Accessories



Windscreen (3400)



Microphone tie clip
(3300)



Amplifier belt clip
(3301)



15 V battery (5115)