


Hand held

Omnidirectional condenser made for a rugged life in the media industry. Outstanding studio quality when reporting on spot.



*Handmade in Sweden  
with lifetime warranty*

Omnidirectional condenser made for a rugged life in the media industry.  
Outstanding studio quality when reporting on spot.


- **Omni**
- **Transformerless**
- **Shock absorbing rubber fitted capsule**
- **Insensitive to hand noise**
- **Built-in pop protection**
- **12 - 52 V phantom**

Frequency response ( see graph )	40 - 20 000 Hz
Polar pattern	Omni
Max. SPL ( 1 % THD at 1 kHz)	125 dB
Sensitivity at 1kHz	7,5 mV / Pa $\pm$ 1 dB
A-weighted noise level( IEC 179-A)	21 dB
Power supply	12 - 52 V phantom
Current consumption	4 mA
Output impedance	< 200 $\Omega$
Minimum load impedance	1 k $\Omega$
Connection	3-pin XLR pin 1: earth ( Shield ) pin 2: plus ( Hot ) pin 3: minus ( Cold )
Net weight	295 g
Length	185 mm
Diameter	24 / 47 mm




### Frequency response (at 1m distance)

The frequency response may vary within  $\pm 2,5$  dB of the published graph.  
Before delivery, each microphone is measured and accompanied with it's own graph.

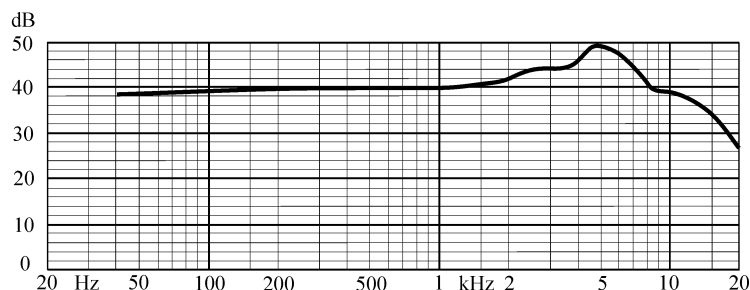

### Polar diagram

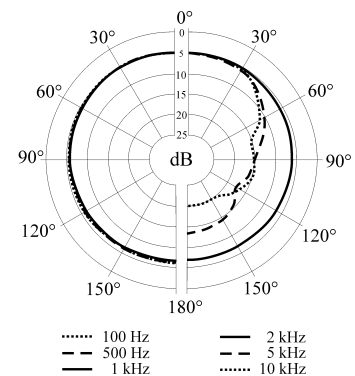

## Milab Microphones AB

Mailing address  
P. O. Box 1342  
S-251 13 HELSINGBORG  
SWEDEN

Office address  
Norra Strandgatan 4

Phone  
+46 42 381620

Fax  
+46 42 136350

E-mail  
milab@milabmic.com  
Internet  
www.milabmic.com